

# Thermally Advantage Chassis

## CE/FCC COMPLIANCE !!


- Unique design for Intel® Pentium®4 and AMD® high-speed CPU's
- Front I/O access - USB, Audio and IEEE 1394 (FireWire)
- Screwless drive installation for easy assembly
- Intrusion switch function for high security
- Excellent thermal and EMI solutions



\* All brand names and trademarks are the property of their respective owners. Design and specification are subject to change without previous notice.

## Micro ATX Desktop Case

Model No. ECE1253S

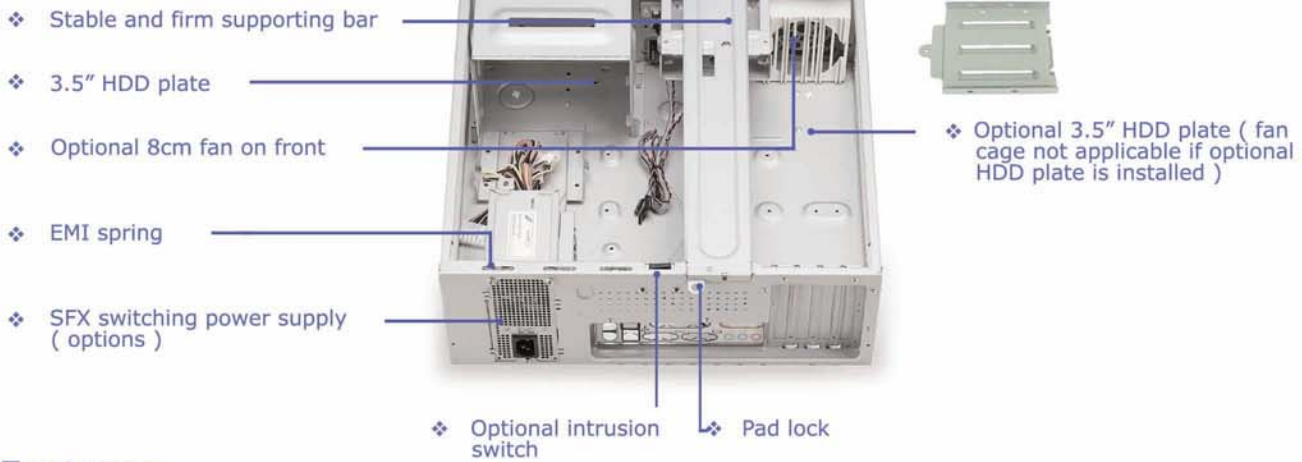


### Features

- No more sharp edges.
- Detachable logo plate.
- Screwless front panel for easy installation.
- Pad lock and optional intrusion switch for high security.
- Optional front IO access - 2\*USB, 2\*Audio and/or IEEE 1394 (FireWire).

## ATX Desktop Case

Model No. ECE1255

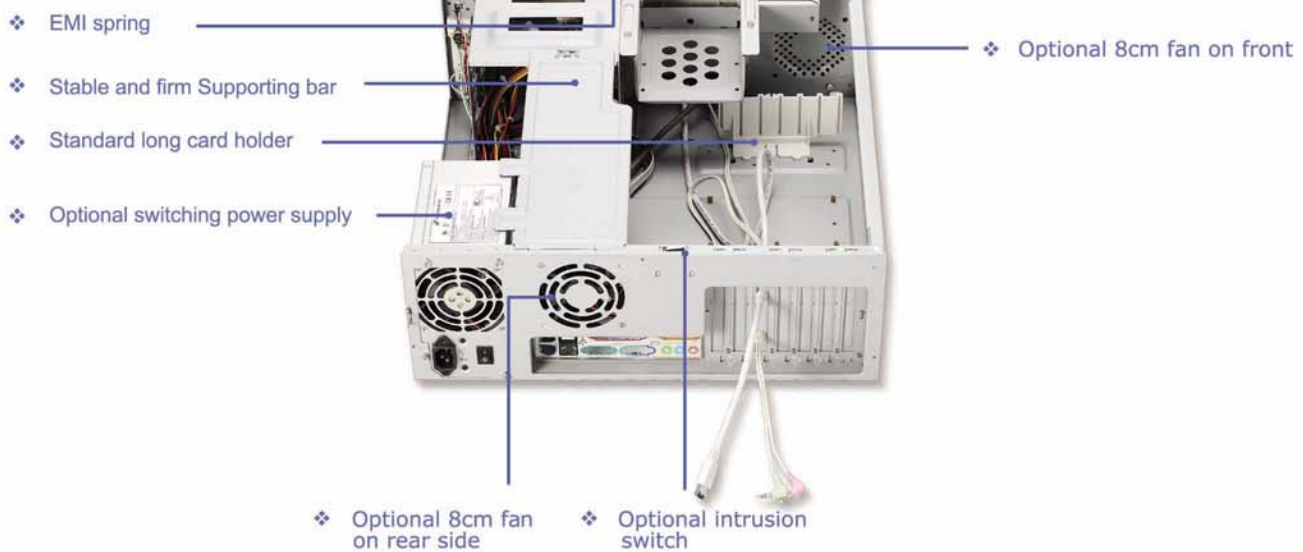

### Features

- AT/ATX/Micro ATX MB application.
- Strong central-bridge design.
- Screwless front panel for easy installation.
- Stable & durable construction with 1.0mm sheet metal.
- Optional front IO access - 2\*USB, 2\*Audio and/or IEEE 1394 (FireWire).

# Super Mid Tower Case

Model No. ECE4252



a



b

- ❖ Optional thermal solutions :
  - a. fan duct for cool air intake to CPU
  - b. 8cm side fan kit for cool air intake to CPU
- ❖ Optional 12cm rear fan for heat exhaust
- ❖ Optional screwless plastic holder kit for add-on card & slot cover (3 combinations)
- ❖ Optional intrusion switch



- ❖ Screwless lock devices for four external 5.25" + two 3.5" drive bays
- ❖ Tool-free detachable cage for two internal 3.5" drive bays
- ❖ Optional 8cm front fan for cool air intake
- ❖ Optional HDD cage & shockproof rubber kits



❖ Easy Assembly & maintenance



❖ HDD shockproof kits



❖ Optional Acrylic side vent cover



## Features

- Mechanical and thermal test approved by Intel®
- Excellent thermal and EMI performance.
- All around folded metal edge for safety installation.
- Screwless front panel and side door for quick assembly.
- Screwless/tool-less designs to minimize assembly time.
- Optional square logo adaptor & acrylic side vent cover.
- Optional supporting bar with 3 various length card holders.
- Optional 8cm front & side fan + 12cm, 8cm or 9cm rear fan for excellent cooling.
- Detachable tool free HDD drive cage with optional shockproof rubber kits.
- Optional front I/O access - 2 or 4\*USB ports (USB 2.0 version ready ), 2\*Audio and/or IEEE 1394 (FireWire).

# Micro ATX Tower Case

Model No. ECE3255



- ❖ Optional thermal solutions:
  - fan duct for cool air intake to CPU
  - 8cm side fan kit for cool air intake to CPU

- ❖ Optional 8cm fan at rear window

- ❖ Optional intrusion switch

- ❖ Optional screwless design for add-on card holder and slot cover, 2 combinations (patent pending)



- ❖ Screwless lock devices for two external 5.25" drive bays

- ❖ Screwless lock devices for two 3.5" drive bays

- ❖ HDD shockproof rubber kits

- ❖ Optional 8cm fan for cool air intake

- ❖ Optional square logo adaptor

- ❖ EMI spring (patented)

- ❖ Optional 3.5" HDD plate



## Features

- Unique design for intel® Pentium® 4 & AMD® high-speed CPU's.
- Optional front access: 2\*USB, 2\*Audio and/or IEEE 1394 (FireWire).
- Excellent thermal solutions: Optional 8cm fan on rear, front and side door.
- Screwless drive installation for easy assembly without removing front panel.

## Specification

Model No.	Micro ATX Desktop ECE1253S	Desk Top ECE1255	Micro ATX Tower ECE3255	Mid Tower ECE4252
Drive Space				
-5.25" ( Exposed )	2	2	2	4
-3.5" ( Exposed )	1	2	2	2
-3.5" ( Hidden, 1" H )	1	1	1	2
-3.5" (Hid. options )			1	2
Motherboard	Micro ATX	ATX/Micro ATX	Micro ATX	Micro ATX ATX M/B (12x9.6")
Power Supply	SFX	PSII/ATX	PSII/PSIII/SFX P4	ATX 12V
Ventilation (Options)	Front: 8cm fan	Front: 8cm fan Rear: 8cm fan	Front: 8cm fan Left side: 8cm fan Rear: 8cm fan	Front: 8cm fan Left side: 8cm fan Rear: 12cm,8cm or 9cm fan
Measurement ( WxDxH )	445x396x137 mm 17.7x15.6x5.4 inch	484x439x154 mm 19.0x17.3x6.1 inch	190x373x353.5 mm 7.5x14.7x13.9 inch	192x482x426 mm 7.5x19.6x16.8 inch
Weight ( NW/GW ) - W/O PSU	5.6/6.7 kgs 12.3/14.7 lbs	7.5/8.6 kgs 16.5/18.9 lbs	6.0/7.0 kgs 13.2/15.4 lbs	8.2/9.2 kgs 18.0/20.2 lbs
Standard Packing - 20/40 FT CTNR	1.70 cu.ft./pc 576/1168 pcs	2.22 cu.ft./pc 450/920 pcs	1.80 cu.ft./pc 585/1170 pcs	2.55 cu.ft./pc 391/823 pcs
Bulk Packing - 20/40 FT CTNR	840/1680 pcs	560/1230 pcs	770/1540 pcs	480/1056 pcs