

FUNDAMENTAL BUILDING BLOCK OF INTERNET APPLIANCE


CONCORD

2U, 19" RACK-MOUNT CHASSIS ECR9200

- High security
- Excellent thermal solution
- Supports ATX motherboard or extended ATX motherboard up to 12"x13"
- Available for PS2 type or mini redundant : hot-swap, hot-plug power supplies
- Easy Access Control & Alarm Panel
- Complying with CE, FCC Class B requirements




Intel® pentium 4 support ready!!

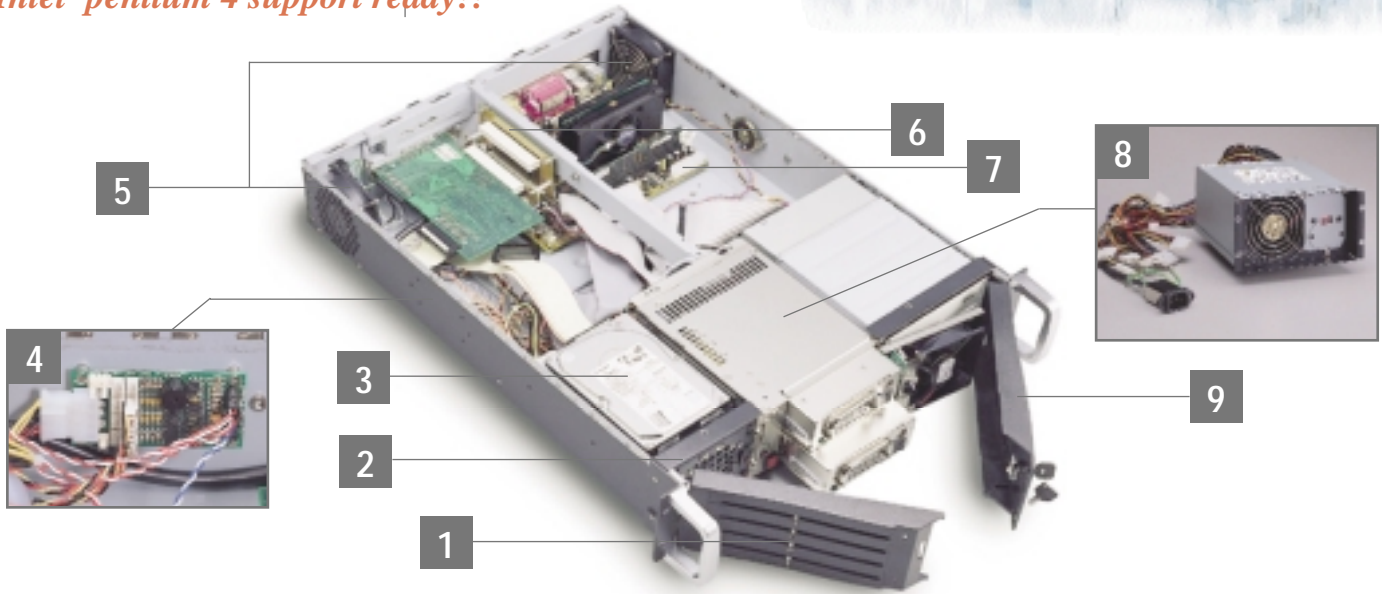

■ Front View



■ Rear View Of ECR9200

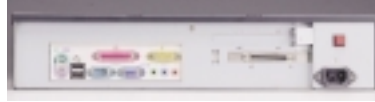

■ Rear View Of ECR9201/9202



Quick View

- 1** Easy Access Control Panel :
 - Power ON/OFF switch comes with LED indicator.
 - System reset button on rear panel.
 - HDD, Fan fail, Thermal fail LEDs.
 - Fan & Thermal Alarm Reset button.
- 2** One 6 cm ball-bearing cooling fan on front.
- 3** Removable tray for 1" high 3 x 3.5" drive bays.
- 4** A optional fan/thermal detect board.
- 5** Two 8 cm ball-bearing cooling fans on the end of side panels.
- 6** Several varieties of 32 bit or 64 bit PCI riser cards available.
- 7** Supports dual processors capable M/B size up to 12" (W) x 13" (D).
- 8** Available for PS/2 type power supply or mini redundant power supply.
- 9** Lockable front panel for running security.
- 10** Color : beige & black.

Specifications

Model No.	ECR9200 / 9201 / 9202
Drive Space:	5.25"(Exposed)x1 + 3.5" (Exposed)x1 3 Hidden 3.5" drive bays for 1" height HDDs
Mainboard:	Available for ATX M/B or Extended ATX M/B(12"x13")
Expansion:	<ul style="list-style-type: none"> • ECR9200 (standard): 2 x 32 bit PCI riser card at MB slot#5 and slot #6. • ECR9201 / 9202 (options at MB slot#6 or slot#5): (a). 3 x 32 bit PCI (b). 2 x 32 bit PCI + 1 x AGP (c). 2 or 3 x 64 bit PCI riser card
Power Supply:	PS/2 type power supply up to 400W or mini Redundant power supply up to 300W
Ventilations:	6 cm ball-bearing fan (front) x 1 and 8 cm ball-bearing fan (rear) x 2
Measurement:	482.6 mm (W) x 576.3 mm (D) x 88.6 mm (H) 19.0" (W) x 22.7" (D) x 3.48"(H)
Weight (N/W,G/W):	8.1/10.6 KGS (17.8/23.3 LBS)
Standard Packing:	1 PC/CTN/3.13 CUFT., 20/40 FT CTNR: 310/644 PCS



ECR9200



ECR9200B