


2.5" Easy One-Touch Backup USB 2.0 External Enclosure

Model : XE211UL

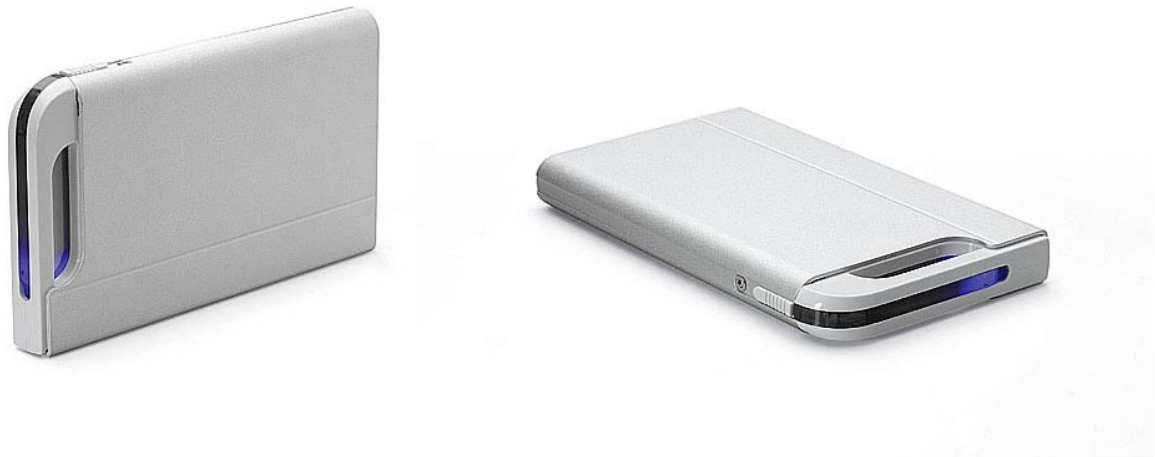

Feature

- *Easy assembly.*
- *Easy One-Touch backup to copy/save files*
- *High-speed (480Mbps) USB host and device and backward compatible to USB 1.1 (12 Mbps)*
- *Supporting USB storage devices with USB mass storage device class compliance*
- *Supporting USB storage devices with FAT 12/16/32 file system*
- *USB 1.0 mass storage class bulk-only specification*

Specifications

- *Compatible with USB 2.0 specification*
- *Easy to operate, only the backup key required when duplicating data*
- *Supporting USB mass storage standard device system format, supports FAT12/16/32*
- *Small and compact, convenient to carry*
- *Display: LED display (power, HDD access)*
- *Case material: Aluminum*
- *Dimensions: 5.9" (L) x 3.3" (W) x 0.7" (H)*
149 mm (L) x 83.5 mm (W) x 17.5 mm (H)

2.5" USB 2.0 + 1394a Combo External Enclosure

Model : XE211C / XE211F



Feature

- Easy assembly.
- Supporting 2.5" IDE hard disk drives
- Provides hot-swap function to select active device USB or 1394.
- Provides auto-detect function to select active device between USB and 1394.
- IEEE 1394-1995 and IEEE P1394a compliant.
- USB 1.1 and USB 2.0 compliant.
- USB Mass Storage Class Bulk-Only Transport Specification Compliant.
- Generic driver support for Microsoft Windows 98SE above, Apple MacOS and Linux.
- (Windows 98SE need vendor driver for USB)

Specifications

- PL-3507 Combo USB 2.0 / IEEE1394 to IDE Bridge Controller
- Compatible with USB 2.0 and 1394a specification
- Supporting USB mass storage standard device system format, supports FAT12/16/32
- Small and compact, convenient to carry
- Display: LED display (power, HDD access)
- Case material: Aluminum
- Dimensions: 5.9" (L) x 3.3" (W) x 0.7" (H)
149 mm (L) x 83.5 mm (W) x 17.5 mm (H)

2.5" Dual interface- eSATA and USB 2.0 External Enclosure

Model : XE211JSU



Feature

- Easy assembly.
- Supporting 2.5" SATA hard disk drives
- Silent operation with aluminum housing and tray
- Dual interface: eSATA and USB 2.0
- Maximum transfer rate up to 3Gbits/s (eSATA) or 480 Mbits/s (USB 2.0)
- Plug and play
- Easy One-Touch backup to copy/save files (specified models only)

Specifications

- Interface: SATA HDD to eSATA + USB 2.0
- HDD: SATA HDD
- Power Supply: External 5V/1.5A AC adapter or USB bus power
- Chipset: JMicron JM20336
- Platforms: Windows XP/2000/Me/98SE/ Mac OS X or above
- Display: LED display (power, HDD access)
- Case material: Aluminum
- Dimensions: 5.9" (L) x 3.3" (W) x 0.7" (H)

149 mm (L) x 83.5 mm (W) x 17.5 mm (H)