

Aluminum Mid Tower Chassis



Thermally Advantage Chassis

Supports Intel® Pentium® 4 & AMD® Athlon® CPU !!

- OPTIONAL FRONT I/O KITS:
2*USB (4*USB, V2.0 READY), 2*AUDIO
& FIREWIRE PORTS (IEEE1394)



ECE4802

Features

- ✓ Mechanical and thermal test approved by Intel®
- ✓ Intel Pentium® P4 and AMD Athlon® CPUs support ready.
- ✓ Screwless front panel and side door.
- ✓ Optional HDD shockproof rubber kits.
- ✓ Detachable tool free cages for 3.5" drives.
- ✓ Screwless cover holder for add-on cards.
- ✓ Screwless/tool-less design to minimize assembly time.
- ✓ Optional Front I/O access - 2 or 4 *USB 2.0 ports, Audio, and/or IEEE1394 (FireWire),
- ✓ Optional 8 cm front & side fan +12 cm, 8 cm or 9 cm fan on rear for excellent thermal solutions.
- ✓ Complete folded metal edge.
- ✓ Complying with CE & FCC requirements.



*. All brand names and trademarks are the property of their respective owners.

*. Design and specification are subject to change without previous notice.

*. For up-to-date product information, please visit Ever Case web-site: <http://www.evercase.com>.

Inside view :



a.




b.

❖ Optional thermal solutions:

- a. fan duct for cool air intake 0to CPU
- b. 8cm side fan kit for cool air intake to CPU

❖ Optional 12cm rear fan for heat exhaust

❖ Optional intrusion switch

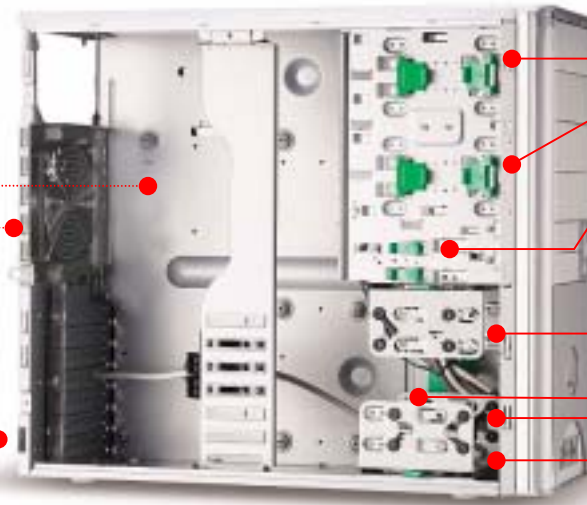

❖ Screwless lock devices for four external 5.25" + two 3.5" disk drive bays

❖ Tool-free detachable cage for two internal 3.5" drive bays

❖ Optional 8cm front fan for cool air intake

❖ Optional 3.5" disk drive cage with shockproof rubber kits



❖ Optional screwless plastic holder kit for add-on card & slot cover



❖ Easy Assembly & maintenance



❖ Optional supporting bar with 8 cm side fan



❖ Optional Add-on card guider

Specification

Model No.	ECE4802 Aluminum Mid Tower	
Drive Space	5.25" (Exposed) x4 + 3.5" (Exposed) x2 + 3.5" (Hidden) x2 + Optional 3.5" (Hidden) x2 ** Up to 10 Drive Bays (CD-ROM/DVD'S less than 190.5 mm /7.5"ln depth are recommended at 3rd and 4th 5.25" Bays)	
Motherboard	Micro ATX / Standard ATX M/B (12" x 9.6")	
Power Supply	ATX 12V Switching Power Supply	
Ventilation (Options)	Front : 8 cm fan x1+ Rear : 12 cm, 8 cm or 9 cm fan x1 + Left side : fan duct or 8 cm fan x1	
Measurement (WxDxH)	192 x 490 x 426 mm/ 7.5"x 18.9"x 16.4"	
Weight (NW/GW)	6.0/7.3 kg • 13.2/16.1 lb (w/o Power Supply) 8.2/9.5 kg • 18.1/20.9.lb (w/ Power Supply)	
Standard Packing	2.55 cuft./pc	391/823 pcs(20/40 ft. container)
Bulk Packing	480/1059 pcs (20/40 ft. container)	