

Thermally Advantage Chassis

CE/FCC COMPLIANCE !!

- Unique design for Intel® Pentium® 4 and AMD® high-speed CPU's
- Front I/O access - USB, Audio and IEEE 1394 (FireWire)
- Screwless drive installation for easy assembly
- Intrusion switch function for high security
- Excellent thermal and EMI solutions


GC4292
For Gamer



Gamer Mid Tower Case



- ❖ Optional thermal solutions :
 - a. fan duct for cool air intake to CPU
 - b. 8cm side fan kit for cool air intake to CPU
- ❖ Standard 12cm 4 colors LED rear fan for heat exhaust
- ❖ Optional screwless plastic holder kit for add-on card & slot cover (3 combinations)
- ❖ Optional intrusion switch

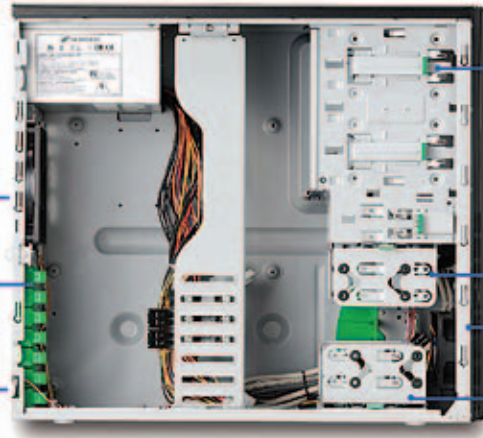

- ❖ Screwless lock devices for four external 5.25" + two 3.5" drive bays
- ❖ Tool-free detachable cage for two internal 3.5" drive bays
- ❖ Optional 6cm front fan *2 for cool air intake
- ❖ Optional HDD cage & shockproof rubber kits

Features

- Mechanical and thermal test approved by Intel®
- Excellent thermal and EMI performance.
- All around folded metal edge for safety installation.
- Screwless front panel and side door for quick assembly.
- Screwless/tool-less designs to minimize assembly time.
- Optional square logo adaptor & acrylic side vent cover.
- Optional supporting bar with 3 various length card holders.
- Detachable tool free HDD drive cage with optional shockproof rubber kits.
- Standard 12cm, 4 colors rear neon fan and optional 6cm rear fan*2 for superior cooling.
- Standard front I/O access - USB *2 + Audio *2 ports (USB 2.0 version), optional IEEE 1394 (FireWire).



- ❖ Transparent side cover with 12cm 4 colors fan & neon light

color of SECC housing



● GC4292RB ● GC4292G ● GC4292P ● GC4292Y ● GC4292R

Specification

Model No.	GC4292 Gamer Mid Tower
Drive Space	Standard 5.25" (Exposed) *4 + 3.5" (Exposed) *2 + 3.5" (Hid., 1" height) + 3.5" (Hid. options) *1
Main-board	Micro ATX or ATX M/B (12"x 9.6")
Power Supply	ATX 12V
Ventilation	Standard : 12cm 4 colors neon rear fan Options : 6cm front fan *2
Options	Neon light with or without voice remote Color : sky blue or light green IEEE 1394 (FireWire) port.
Measurement (with front panel)	192(W)x482(D)x426(H) mm 7.5(W)x19.6(D)x16.8(H) inch
Standard Packing Weight (NW/GW)	1 pc/carton/2.55 cu.ft 391/823 pcs(20/40 ft. container) 8.2/9.2 kgs • 18.0/20.2 lbs (w/o PSU)

